




ENGINEERED FOR MOTION

Sedco 59V Series Vestibule Push Plate Switches



#59V-H (Blue Background with White Legend)

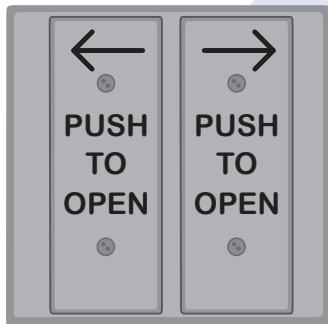

#59V-P (Stainless Steel with Black Legend)



#59V-HSS (Stainless Steel with Blue Legend)

NOT SHOWN

#59V-W (Blue Background with White Wheelchair)

#59V-WSS (Stainless Steel with Blue Wheelchair)

#59V-Plain (Stainless Steel with No Legend)

Product Name Sedco 59V Series

Vestibule Push Plate Switches

Contact Information

MS SEDCO
7898 Zionsville Road
Indianapolis, IN 46268
Phone: (317) 842-2545
www.mssedco.com

Product Description

BASIC USE

The 59V Series vestibule push plate switches are designed to provide reliable activation of any pair of automatic doors from inside a building vestibule.

The 59V Series vestibule switches feature two separate face plates that will allow for independent activation of two automatic doors. Both face plates are integrated onto a single 4 1/2" x 4 1/2" formed stainless steel back plate that will fit a 2-gang electrical box or MS SEDCO's optional surface mount box.

Each unit is built utilizing heavy gauge stainless steel, aircraft quality rivets and screws, durable finishes and the most reliable microswitch in the industry.

Technical Data

- 2—1 1/2" x 4 1/4" All Active Face Plates
- 4 1/2" x 4 1/2" Formed Stainless Steel Back Plate
- 2—UL Listed "Cherry Switch", SPDT, Mom., 15 Amp @ 125V AC
- Rubber "Bellows" Increases Weather Protection (included)

- Fits 2-gang Electrical Box or MS SEDCO Surface Mount Box
- Special Finishes: US3, US4, US10, US10B, US32
- Radio Control Versions Available

ClearPath

ClearPath™ Radio Control Switches solve problems caused by interference and stray signals — and are guaranteed to work where others won't.

DIMENSIONS

See Reverse

APPLICABLE STANDARDS

American National Standards Institute (ANSI) - Building Hardware Manufacturers Association (BHMA) - ANSI/BHMA A156.10 & A156.19.

APPROVALS

UL (Micro-Switch)

Installation

The 59V Series Vestibule Switch is easy to install.

Hardwired Applications:

Mount a standard 2-gang electrical box at the desired wall location. Remove both face plates from the switch assembly. Connect the necessary signal wires to the appropriate switch contacts (COM & N.O. are standard). Secure the switch assembly to the door frame and reattach the face plates.

Sedco 59V Series Vestibule Push Plate Switches



ENGINEERED FOR MOTION

Installation (continued)

Wireless Applications:

Mount a ClearPath™ transmitter and surface mounting box in the desired location. Program the transmitter and connect the wire leads to the COM and N.O. switch contacts. Attach the wall switch assembly to the surface box and reattach the face plate.

Custom Applications:

The 59V Series Vestibule Switches can be customized in a variety of ways. Virtually any legend can be placed on the face plate as well as custom colors or finishes. Contact the factory for pricing.

Availability & Cost

AVAILABILITY

Available internationally from manufacturer's authorized distributors; contact MS SEDCO for location of nearest distributor.

COST

Cost information on MS SEDCO products is available from the manufacturer's authorized distributors.

Warranty

MS SEDCO, Inc. guarantees this product to be free from manufacturing defects for three years from date of installation. Unless MS SEDCO is notified of the date of installation, the warranty will be in effect for three years from the date of shipment from our factory. If, during the first three years, this product fails to operate and has not been tampered with or abused, the unit can be returned prepaid to the

factory and be repaired free of charge. After three years, the unit will be repaired for a nominal **service charge. Limited warranty is in lieu of all other warranties, expressed or implied, including any implied warrantability of merchantability. No representative or person is authorized to assume for MS SEDCO any other liability in connection with the sale of our products. All warranties are limited to the duration of this written limited warranty. In no event shall MS SEDCO be liable for any special, incidental, consequential or other damage arising from any unclaimed breach of warranty as to its products or services.**


Maintenance

MS SEDCO recommends that all maintenance and adjustments be performed by an AAADM Certified Technician.


Technical Services

MS SEDCO's staff of factory trained sales and service personnel offer design assistance and technical support. Local distributors are also available to assist in selecting appropriate devices for specific uses and to provide onsite installation.

BELLOWS DIAGRAM

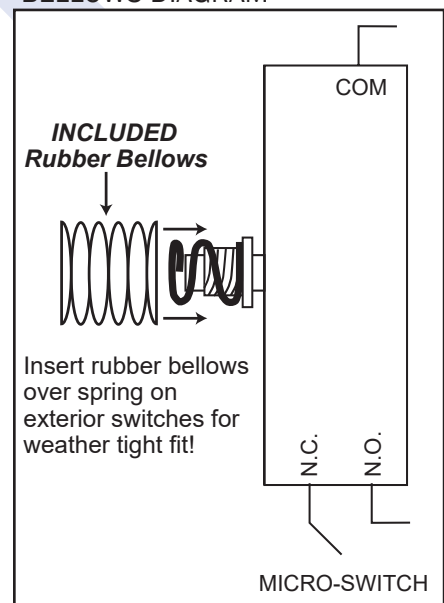

DIMENSIONS

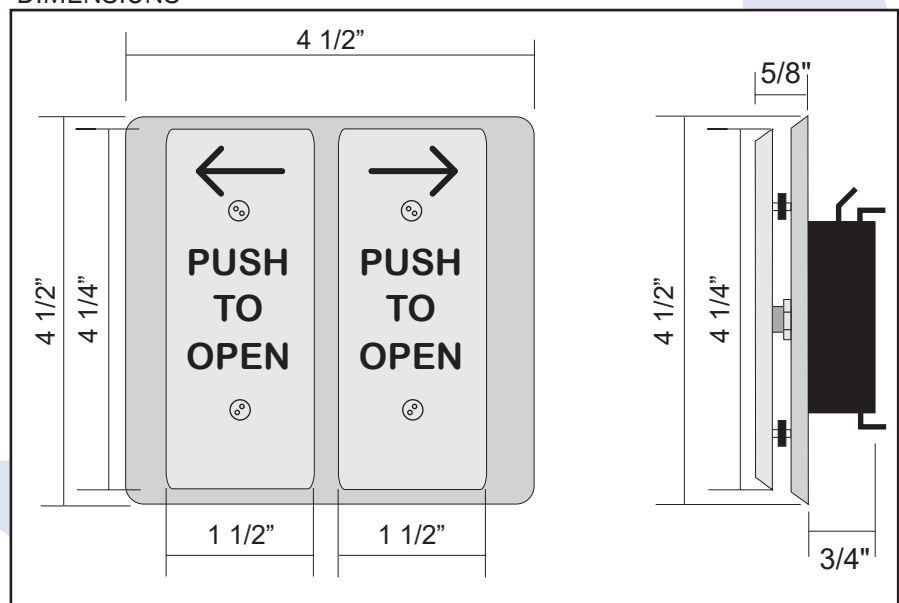

012018