



ENGINEERED FOR MOTION

# Sedco 59J Series Jamb Style Push Plate Switches



#59J-H (Blue Powder Coat with White Paint Filled Legend)



#59J-P (Stainless Steel with Black Paint Filled Legend)



#59J-HSS (Stainless Steel with Blue Paint Filled Legend)



#59J-W (Blue Powder Coat with White Paint Filled Legend)



#59J-WSS (Stainless Steel with Blue Paint Filled Legend)

### NOT SHOWN

#59J-Plain (Stainless Steel with No Legend)

### Product Name Sedco 59J Series

Jamb Style Push Plate Switches

### Contact Information

MS SEDCO  
7898 Zionsville Road  
Indianapolis, IN 46268  
Phone: (317) 842-2545  
www.mssedco.com

### Product Description

#### BASIC USE

The 59J Series jamb style switches are designed to provide reliable, unobtrusive activation of any automatic door.

The 59J Series features 1 1/2" x 4 1/4" face plates in either stainless steel or blue powder coated aluminum with etched and paint filled legends. A formed stainless steel back plate eliminates possible wall damage from standard use.

Mount the 59J Series directly onto the jamb of an automatic door (fits a 1 3/4" frame) or in MS SEDCO's optional surface mount box.

Each unit is built utilizing heavy gauge stainless steel, aircraft quality rivets and screws, durable finishes and the most reliable microswitch in the industry.

### Technical Data

- 1 1/2" x 4 1/4" All Active Face Plate
- 1 11/16" x 4 1/2" Formed Stainless Steel Back Plate
- UL Listed "Cherry Switch", SPDT, Mom. , 15 Amp @ 125V AC

- Rubber "Bellows" Increases Weather Protection (included)
- Fits 1 3/4" Frame or MS SEDCO Surface Mount Box
- Special Finishes: US3, US4, US10, US10B, US32
- Radio Control Versions Available

**ClearPath**

---

*ClearPath™ Radio Control Switches solve problems caused by interference and stray signals — and are guaranteed to work where others won't.*

### DIMENSIONS

See Reverse

### APPLICABLE STANDARDS

American National Standards Institute (ANSI) - Building Hardware Manufacturers Association (BHMA) - ANSI/BHMA A156.10 & A156.19.

### APPROVALS

UL (Micro-Switch)

### Installation

The 59J Series Jamb Style Switch is easy to install.

#### Hardwired Applications:

Using the mounting template provided, make cutout in the door frame. Remove the face plate from the switch assembly. Connect the necessary signal wires to the appropriate switch contacts (COM & N.O. are standard). Secure the switch assembly to the door frame and reattach the face plate.

# Sedco 59J Series

## Jamb Style

### Push Plate Switches



ENGINEERED FOR MOTION

#### Installation (continued)

##### Wireless Applications:

Mount a ClearPath™ transmitter and surface mounting box in the desired location. Program the transmitter and connect the wire leads to the COM and N.O. switch contacts. Attach the wall switch assembly to the surface box and reattach the face plate.

##### Custom Applications:

The 59J Series Jamb Switches can be customized in a variety of ways. Virtually any legend can be placed on the face plate as well as custom colors or finishes. Contact the factory for pricing.

#### Availability & Cost

##### AVAILABILITY

Available internationally from manufacturer's authorized distributors; contact MS SEDCO for location of nearest distributor.

##### COST

Cost information on MS SEDCO products is available from the manufacturer's authorized distributors.

#### Warranty

MS SEDCO, Inc. guarantees this product to be free from manufacturing defects for three years from date of installation. Unless MS SEDCO is notified of the date of installation, the warranty will be in effect for three years from the date of shipment from our factory. If, during the first three years, this product fails to operate and has not been tampered with or abused, the unit can be returned prepaid to the

factory and be repaired free of charge. After three years, the unit will be repaired for a nominal **service charge. Limited warranty is in lieu of all other warranties, expressed or implied, including any implied warrantability of merchantability. No representative or person is authorized to assume for MS SEDCO any other liability in connection with the sale of our products. All warranties are limited to the duration of this written limited warranty. In no event shall MS SEDCO be liable for any special, incidental, consequential or other damage arising from any unclaimed breach of warranty as to its products or services.**


#### Maintenance

MS SEDCO recommends that all maintenance and adjustments be performed by an AAADM Certified Technician.


#### Technical Services

MS SEDCO's staff of factory trained sales and service personnel offer design assistance and technical support. Local distributors are also available to assist in selecting appropriate devices for specific uses and to provide onsite installation.

BELLOWS DIAGRAM

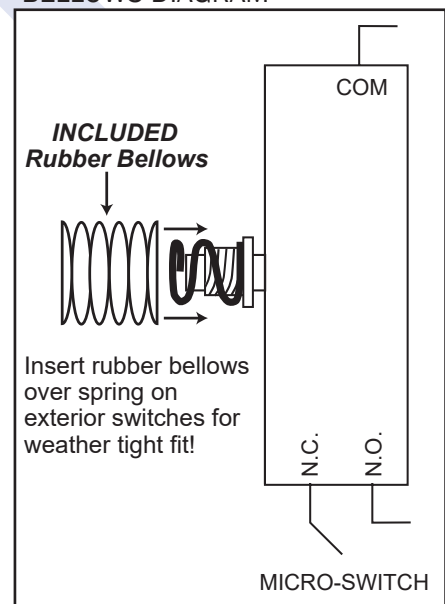

DIMENSIONS

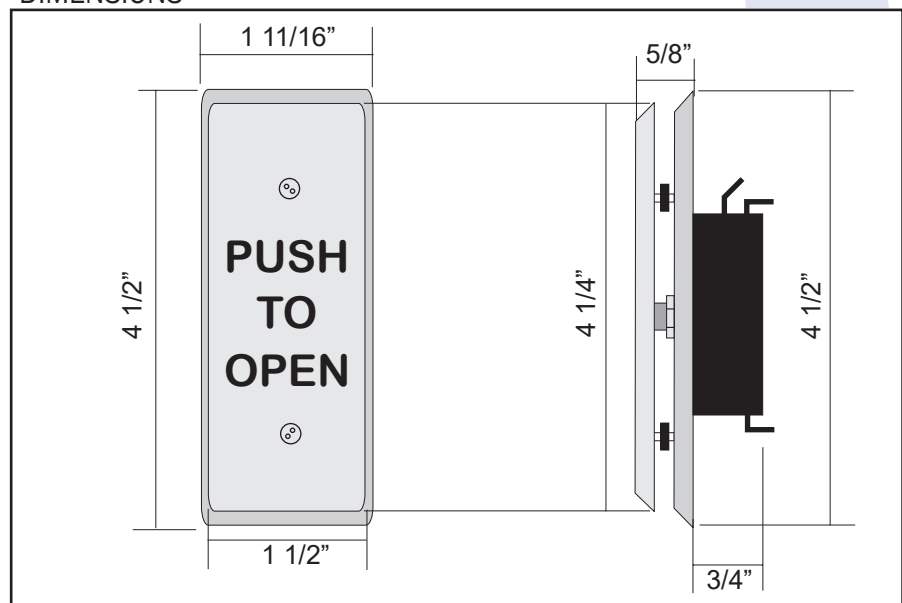

112017