

TCIB-CC

DESCRIPTION

The TCIB-CC Card Cage provides all the necessary hardware and harnessing required to allow the simple wiring of a TCIB Single Space Card to the detector output and controller inputs. The TCIB-CC is equipped with a 48" long cable which is wired to the controller. The cable carries all the power wiring, safety ground, and card outputs terminated to a 12 point terminal block which is typically mounted in the wiring compartment of the cabinet.


TCIB-CC SPECIFICATIONS


PHYSICAL:

- ☑ Dimensions: 3.325"W x 5.75"H x 7.75"L
(8.5cmW x 14.6cmH x 19.7cmL)
- ☑ Weight: approx. 4 lbs. (1.8 kg)
- ☑ Mounting: Unit can stand or lie on shelf

OPERATING:

- ☑ Temperature range: -30°F to 165°F
(-34°C to 74°C)
- ☑ Power requirements: 12-24V DC
- ☑ Warranty: 18 months

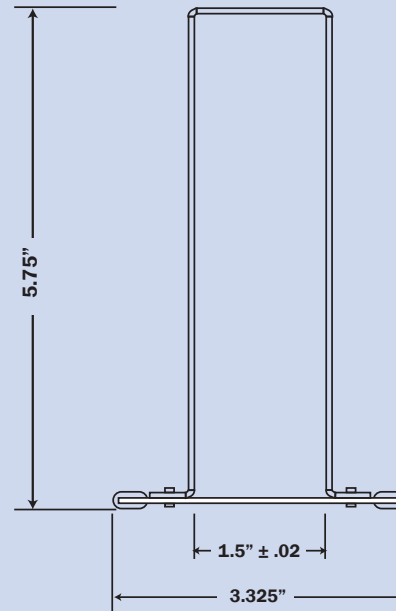

○ ○	DC-	
M	DC+	ENGINEERED FOR MOTION
S	Ch1 Out Collector	
E	Ch1 Out Emitter	
D	Chassis Ground	
C	Ch3 Out Collector	
O	Ch3 Out Emitter	
8	Ch2 Out Collector	
1	Ch2 Out Emitter	
0	Ch4 Out Collector	
4	Ch4 Out Emitter	
4	Ch4 Out Emitter	
R	Spare	
e		
v		
A		
○ ○		